XTREME MANUFACTURING XR1245

Capacity	12,000 lbs
Max Lift Height	45'
Forward Reach	30' 4"
Frame Leveling L/R	11°
Weight	32,930 lbs
Engine	Perkins 122 hp
Fuel Capacity	48 gal
Tires	Foam Filled 15.5 x 25 E3
GPM	49
PSI	3,500
Hydraulic Oil Cap	58 gal
Length to fork face	22' 3"
Width	102"
Height	8' 1"
Wheel Base	124"
Ground Clearance	16.5"
Turning Radius	12' 2"
Warranty	Xtreme 10-5-2

XR1245 LOAD CHART OUTRIGGERS DOWN- STANDARD CARRIAGE

THE REAR AXLE MUST BE LOCKED AND THE OUTRIGGERS FIRMLY AGAINST THE GROUND.

LOAD RATINGS SHOWN ARE FOR VEHICLES EQUIPPED WITH FOAM FILLED TIRES ONLY.

LOAD RATING INCLUDES WEIGHT OF ANY RIGGING.

6,000 LBS AT 24 IN MIN CAPACITY FORK (12,000 LBS PAIR).

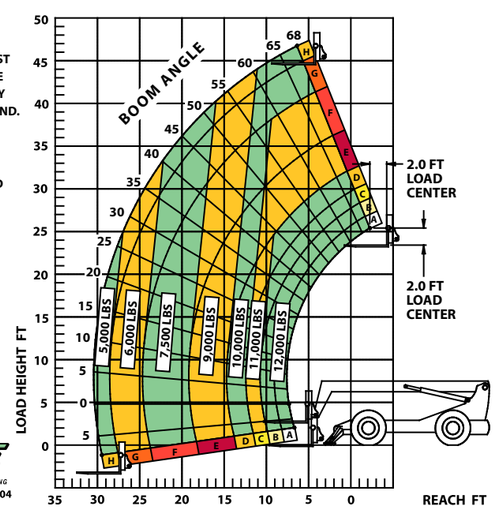

XTREME MANUFACTURING
702-636-2969 • 800-497-1704
P/N 17030-000

STANDARD FEATURES

The XTREME Difference

- 360° Visibility
- Long Life Boom Rollers
- Suspension Seat
- Easy Service Access
- Protected Tilt & Extend Cylinders
- Steel Hydraulic & Fuel Tanks
- Long Life Lexan Labels
- Fiberglass Hoods
- Heavy Duty Boom Chains
- Suspended Pedals
- Electrical Ring Terminals
- Wider Outrigger Stance
- Large Capacity Fuel Tanks
- Trunnion Mounted Sway Cylinders
- Melonite Pins
- Rear Axle Stabilization (RAS)
- Center Mounted Power Train
- Standard Auxiliary Hydraulics
- Solid Steel Plate Chassis
- Steel Dash
- Ductile Steel Manifold
- Easy Cab Mounted Grab Handles
- Reliable Perkins Engine
- Master Disconnect Switch
- Boom Lift Point
- Axle Mounted Outriggers
- Manual Lowering Valve (Cylinders)
- Large Cross Section Boom
- Easy Tie Downs
- "Y" Frame Sway Handle
- Heavy Duty Pre-Cleaner
- Additional High Pressure Hyd Filter
- Direct Engine/Trans Connection
- Individual Gauges and Switches

ATTACHMENTS & ACCESSORIES

Attachments

- Standard Fixed Carriage (48", 60", 72", 96")
- Fork Positioning Carriage (48", 72", 96")
- Swing Carriage
- Tilt Carriage
- Personnel Platform
- Sling Mount
- Bucket (1.0 - 2.0 cu-yd)
- Truss (2 ft, 3 ft, 12 ft, 15 ft)
- Telescopic Truss (Slide on)
- Pole Grapple Carriage
- Grapple Bucket
- Concrete Hopper

Accessories / Options

- Enclosed Cab w/Heat
- Enclosed Cab w/Heat & A/C
- Boom Work Light Package
- Flashing Amber Strobe
- Pintle Hook
- Tail/Turn/Brake Lights
- LED Lighting
- Steel Fenders
- 5th Wheel Attachment
- Boom Maintenance Stand
- Battery Blanket
- Limited Slip Axle(s)
- Locking Fuel Cap
- Soft Cab
- Additional Lift Points
- Swivel Lifting Hook
- Auxiliary Cab Heater
- Dual Batteries
- Clear Glass
- Padded Arm Rest
- Two Wheel Rear Steer

Long-Life Rollers


Boom Lift Point

360° Visibility

Operator Controls

10-5-2 WARRANTY

10 YEARS OR **10,000** HOURS
FRAME & CHASSIS WELDMENT

5 YEARS OR **5,000** HOURS
BOOM WELDMENT & ROLLERS

2 YEARS OR **2,000** HOURS
ENGINE, ELECTRICAL, TRANSMISSION, DRIVE AXLES & HYDRAULIC COMPONENTS

WWW.XMFG.COM

(702) 636-2969 (800) 497-1704
1415 W. BONANZA RD LAS VEGAS, NV 89106